



JET COOLERS

ROTATING HEAD JET COOLER WITH THREADED CONNECTION

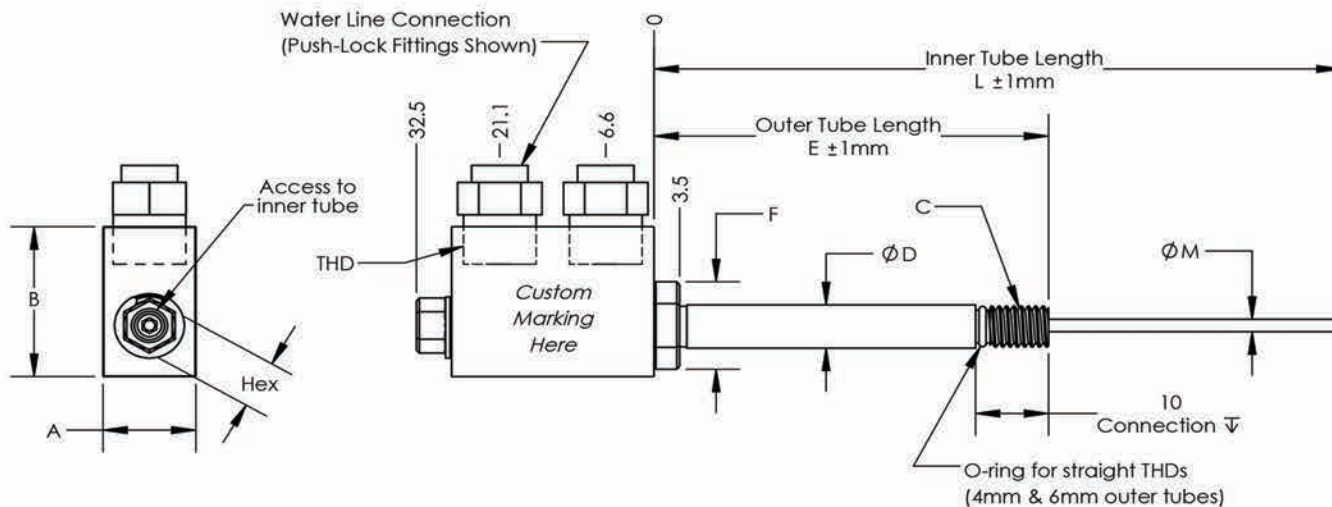

All dimensions in mm

Outer Tube Ø	Ø D	C	Inner Tube Ø	Ø M	Ø B	Ø Hole	F	Hex	A	B	Water Line Connection	Size				
040	4	M4x0.7	012	1.2	4.2	1.7	12.8	7	12.7	22	BP	1/8 BSPT Push-Lock for Ø4mm Tube				
			015	1.5		2.0					B6	1/8 BSPT Push-Lock for Ø6mm Tube				
060	6	M6x1.0	012	1.2	6.2	1.7					14.7	10	15.9	25.4	B8	1/8 BSPT Push-Lock for Ø8mm Tube
			015	1.5		2.0									BT	1/8 BSPT Thread Only
			018	1.8		2.4									NP	1/8 NPT Push-Lock for Ø5/32 Tube
			023	2.3		3.0									NT	1/8 NPT Thread Only
080	8	1/16 PIPE THREAD*	012	1.2	NA	1.7					14.7	10	15.9	25.4	Ex: HC-080T-018-RQBP-E150-L200-M 123 (Ø8.0mm outer tube with a 1/16 BSPT thread, Ø1.8mm inner tube, 1/8 BSPT push-lock fittings for a 4mm tube water line connection, E length of 150mm, L length of 200mm, and a custom marking of 123)	
			015	1.5		2.0									Ex: HC-100T-023-RQNT-E175-L210 (Ø10.0mm outer tube with a 1/8 NPT thread, Ø2.3mm inner tube, 1/8 NPT threads for the water line connection, E length of 175mm, L length of 210mm)	
			018	1.8		2.4										
			028	2.8		3.6										
100	10	1/8 PIPE THREAD*	018	1.8	NA	2.4	14.7	10	15.9	25.4	Ex: HC-100T-023-RQNT-E175-L210 (Ø10.0mm outer tube with a 1/8 NPT thread, Ø2.3mm inner tube, 1/8 NPT threads for the water line connection, E length of 175mm, L length of 210mm)					
			023	2.3		3.0										
			028	2.8		3.6										
			032	3.2		4.2										

*For RQBX option, the outer tube pipe thread is BSPT
 For RQNX option, the outer tube pipe thread is NPT

Core Pin Recommended Mounting

